

# Heat That Tote!

## For Metal, Plastic or Caged Totes


Temperatures

up to



160°F (71°C)

The contents in your tote tanks (IBCs), such as chemicals, molasses, oil, etc. can be slow moving and uncooperative when you need it most, especially when winter strikes. Heat allows the contents to flow at a manageable rate. Our wrap-around tote blanket design allows you to heat a tote/tank (a.k.a., IBC or intermediate bulk container) in a safe way. Wrap-around surface heaters, unlike immersion heaters, will not contaminate or scorch your product. Because the top of the tote is the point of greatest heat loss, an insulated "cap" is recommended for faster heat-up and more efficient temperature maintenance.

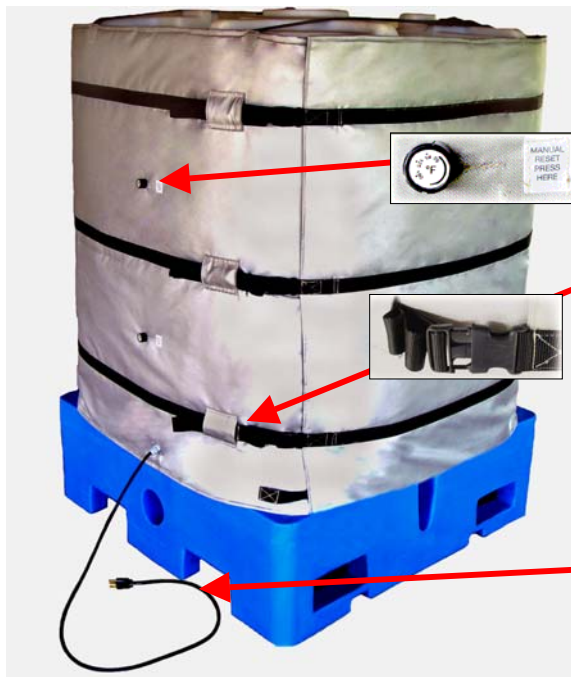

### Specifications:

- Two separate heat zones
- Built-in, manual reset, safety thermostat
- Thermostat adjusts from 50° - 160°F (10° - 71°C)\*
- Full coverage Plug-and-Heat system
- Adjusts to tote size with buckled straps
- Fits totes widths from 40" to 48"
- Three height sizes: 36", 42", 48"
- 1/4" (6mm) fiberglass insulation
- Heat resistant silicone cloth facing and liner
- Electric Supply: 120 or 240VAC
- Total Wattage: 120VAC =1440w, 240VAC=2880w
- Patented electric ground for your safety
- Power cord 6 ft. (1.8m) long with standard plug
- "Mouse-hole" designed for dispensing valve
- Optional insulated top cover reduces heat loss
- Thermostat high-limit set at 195°F (91°C)

\* maximum temperature can vary based on application (tote tank size, contents, ambient temp., wind or indoor protection, etc)

Tote Height in (mm)	Total Wattage 120V / 240V	Heater Code 120 VAC	Heater Code 220 VAC
36 (914)	1440/2280	DM-600FWH/36-120	DM-600FWH/36-220
42 (1067)	1440/2280	DM-600FWH/42-120	DM-600FWH/42-220
48 (1220)	1440/2280	DM-600FWH/48-120	DM-600FWH/48-220

**Optional Accessory:** Part Code DM-600TPI-A unheated Velcro mounting top insulator pad



Ask for literature on our drum & tote mixers, drum rollers and tumblers, drum/tote pumps & hand nozzles.  
DRUM-MATES® Inc., Liquid Processing Div., T: 609-261-1033, F: 609-261-1034, E: drummates@comcast.net

# Tote Heaters


## Wrap Around Style

- Full Coverage
- Simple One-Step strap & Velcro® Installation
- Two Separate Heat Zones
- Both Heats and Insulates
- High Temperature Limit at 160°F (65.5°C)
- Patented Ground for your Safety
- Designed for Use Undercover (Minimal Weather Exposure)
- 120VAC/1PH-1440 Watt or 240VAC/1PH-2880 Watt
- Fiberglass insulation layer, ¼", also available in ½" & 1"



DM-600FWH Series Tote Heaters

## Design Layout

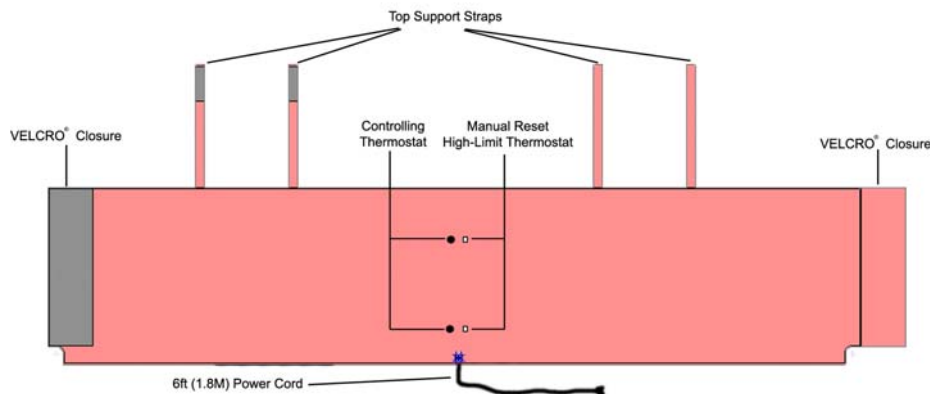

## Bottom Layer Style

- Thermocouple Proportioning Controller Included
- 180F (82C) Exposure Temperature
- Uniform Heat Underneath Tote/IBC
- Moisture and Chemical Resistant
- Designed for Use Undercover



## Three easy installation steps...



Step 1: Place HotPoly heater in IBC bin.



Step 2: Place poly tank on the heater.



Step 3: Attach heater to controller to use.



Ask for literature on DRUM-MATES® drum & tote mixers, drum & tote pumps & hand dispensing nozzles.  
DRUM-MATES® Inc., Liquid Processing Div., T: 609-261-1033, F: 609-261-1034, E: drumamts@comcast.net