

DM-55DDP/38PP Double Diaphragm Pump

Bolted, 3/8" Port, Max. 6.8 Gpm, Choice of Polypropylene or Kynar

SPECIFICATIONS

FLOW RATE adjustable to.....0-6.8 gpm (26 lpm)

PORT SIZE

Inlet and Outlet 3/8" NPTF (BSP)

AIR INLET 0.25" NPT

AIR EXHAUST 0.25" NPT

SUCTION LIFT (dry)11' (3.4 m)

Teflon® (dry)11' (3.4 m)

MAX. PARTICLE SIZE (Dia.) 0.10" (2.5 mm)

SHIPPING WEIGHT


Polypropylene 3.0 lbs (1.4 kg)

Kynar 3.0 lbs (1.4 kg)



PERFORMANCE

Determined by actual flow meter tests.

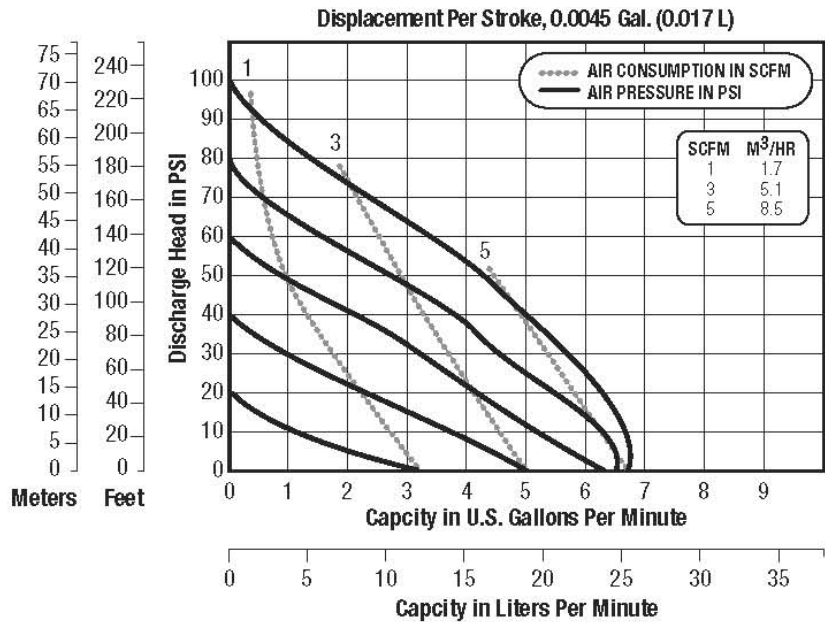

CAUTION: Do not exceed 100 psig (6.8 bars) air supply or liquid pressure.

DIMENSIONS

