1.5" Xtreme Duty AL Hand Nozzles

Model DM-790HFR Series, Pressure & Gravity Transfer Extreme Liquids

Benefits & Features...

- ⇒ For liquids compatible with Alum., Stainless & Teflon or Viton
- ⇒ Helps prevents spillage during critical liquid transfer operations
- ⇒ Careful fluid control for operator and environmental safety
- ⇒ Ergonomic comfort with long reach 8" spout & 90° pour angle
- ⇒ Simplifies liquid filling & bulk transfer into tanks & containers
- ⇒ Features: Hold-Open trigger catch and XP cable lanyard ring

Model # DM-790HFR Nozzle, Xtreme Duty, Manual Shut-off

P# DM-700HFR/AMTS1: Materials: Aluminum, stainless steel, Teflon (wetted parts)
P# DM-700HFR/AMVS1: Materials: Aluminum, stainless steel, Viton (wetted parts)
Hose Inlet: 1.5" female NPT (Also available in 1" AL or polypropylene)

Dispensing Mode & Spout: Manual shutoff and hold-open with 8" long spout
Dispensing Flow Rate: 60 Gallons per minute, (228 liters per minute)

Maximum Pressure: 50 PSI, (350 kPa)

Temperature Range: 15°F - to 125°F (or up to 155°F with operator protection)

NET Weight: 6.5 lbs, (2.95 Kg.)




Optional Components:

- Maintenance/service kit
- 1½" hose barb, SS or brass

Parts List

1	Body, aluminum
2	Handle, aluminum
3	Cap, aluminum
4	Cap gasket
5	Spout, aluminum
6	Hose barb, optional accessory
7	Plunger stem, stainless
8	Large disc holder, stainless
9	Large disc, Teflon
10	Large disc nut, stainless
11	Large disc washer, stainless
12	Spring, stainless
13	Small disc, Teflon or Viton
14	Small disc guide, stainless
15	Small disc holder, stainless
16	Stuffing box, stainless
17	Packing gland, stainless
18	Packing nut, stainless
19	Packing, Teflon or Viton
20	Groove pin, stainless

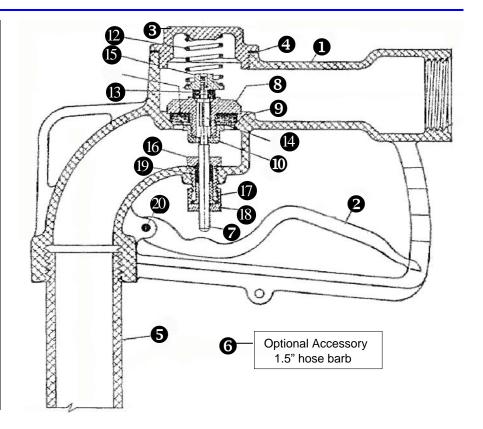



DRUM-MATES® equipment assemblies are provided as separate components each sold on a separate basis. Ask for literature on DRUM-MATES® drum & tote heaters, mixers, drum tumblers, pumps and hand nozzles. DRUM-MATES® Inc., Mixer & Pump Div., E: drummates@comcast.net, T: 609-261-1033, F: 609-261-1034