


DRUM-MATES® DM-55REHP Series **Reciprocating Hand Pump**

For use in Drums or Totes (IBC's)

Benefits & Features

- Long-life construction: high quality, heavy duty
- Fine control discharge rate of 1 litre per cycle
- Excellent for heavier thickness materials
- Pump handle transferable for overhead operation
- Self-lubricating TFE piston ring, works wet or dry
- Numerous materials to choose from for many applications

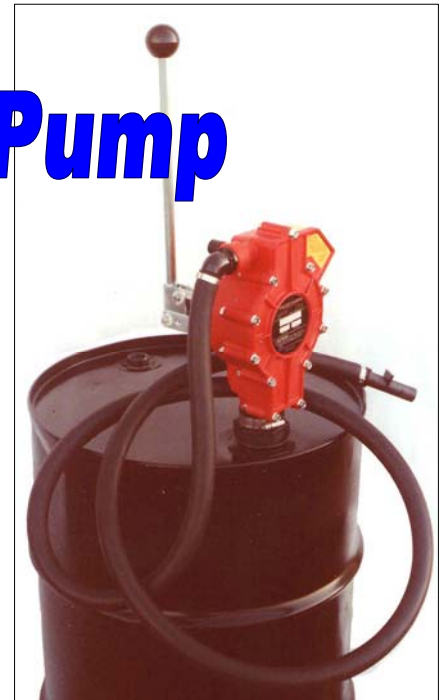

Components

Select Materials of Construction (MOC) for Application Compatibility

Internal parts:	316 ss, Hastelloy, Teflon
Gaskets:	Viton or Nitrile (buna-N) or EPDM
O-rings:	Viton or EPDM
Pump Body:	Polyester, PPS (Ryton) or ECTFE (Halar)
Discharge Hoses:	PVC, EPDM, Nitrile, Polyethylene or TFE
Suction Tubes:	PVC, Polyester, Polyethylene or TFE
Discharge Spout:	Polyester or ECTFE (Halar)


**Special
Safety Feature**
Tamper-proof handle
can be *locked closed*

Optional Components

DM-55REHP/HPN1A-XT	Extension tube, 16.5", polyester, (& other MOC's)
DM-55REHP/HPN1A-TC	Tube coupler, polyester
DM-55REHP/HPN1A-DA	Transfer hose assembly, 9 ft., polypropylene
DM-55REHP/MFK	Fine filter kit, 1 Micron, MOC: PP, ECTFE
DM-55REHP/MFRC	Replacement filter capsule

Operating Specifications:

Liquid Flow Rate:	1 quart per 2 stroke cycle, (1.1 liter)
Suction (Lift) & Head (Push):	15 feet, (4.5m), Maximum Head: 25 feet, (7.6m)
Maximum Thickness:	430 Cps, 2000-SSU, 190-Ford #3, 25-Zahn #5, 22-Mobilometer
Suction Tube:	1" NPT Opening
Discharge Hose:	¾" NPT Opening
Hand Pump Kit Weight:	Approximately 12 lbs., (5.5 Kg.)

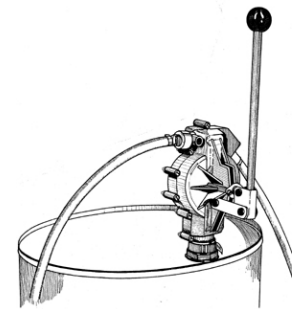

WARNING! Before Pumping...

- ▶ Always check chemical compatibility of liquid with materials of construction of your pump.
- ▶ Read, understand & comply with Operator Manual safety guidelines to avoid risk of injury or damage.
- ▶ Wear protective safety clothing and apparatus such as eye protection, respirator, gloves & apron.



For best batch mixing Quality Control before pumping, ask for DRUM-MATES® TQMixing™ Guidelines.
For explosion-proofing, use grounding kit No. DM-166GWK for all-metal air driven mixers or pump equipment.
NOTE: For easy "Pick 'n' Match", all mixer shafts, mixer drives and accessories are sold separately.
DRUM-MATES® Inc., Mixer & Pump Div., Tel: 1-800-621-3786 and 609-261-1033, Fax: 609-261-1034